



# Circularity Package v2

Circularity Package add-on to ecoinvent 3.10 cut-off

Photo by Julia Cilleruelo Palomero | Sevilla

openLCA version

2.2.0

Date

25 July 2024

Review version

2.0

Authors:

Julia Cilleruelo Palomero

Dr. Andreas Ciroth



**GreenDelta**

[gd@greendelta.com](mailto:gd@greendelta.com)

GreenDelta GmbH

Alt-Moabit 130

10557, Berlin

Germany

<https://www.greendelta.com/>

## Contents

Contents .....	2
List of Figures .....	3
List of Tables .....	3
1 Introduction to the update .....	4
2 Background .....	4
3 Goal and Scope of the Circularity Package database, use advice .....	5
4 Methodology: how was circularity implemented? .....	5
4.1 Required variables for circularity .....	5
4.2 Adapted Circularity indicator calculations to fit LCA .....	9
4.2.1 Material Circularity Indicator (MCI) .....	9
4.2.2 Circularity Index (CI) .....	10
4.3 Quantifying Circularity .....	11
4.3.1 Understanding supply chain in terms of Circularity .....	11
4.3.2 Quantifying Circularity with Circularity Indicators .....	13
5 Summary .....	13
6 How to obtain the database & Support .....	14
7 References .....	14

Funded by  
PRIMUS EU PROJECT



Horizon Europe GA No. 101057067

## List of Figures

Figure 1: Screenshot of a production process with some virgin material being extracted from earth .....	8
Figure 2: Screenshot of a waste treatment process for final disposal and some material recovery. ....	8
Figure 3: A generic life cycle model to explain the location of the shadowing elementary flows with respect to the supply chain.....	9
Figure 4: The Circularity LCIA Method allows to quantify circularity variables of the model.....	11
Figure 5: To visualise circularity across the supply chain, calculate the model with the LCIA Method for Circularity within the database.....	12
Figure 6: Screenshot for one of the multiple ways to visualise results for circularity across the supply chain with openLCA .....	12
Figure 7: Circularity indicators script for openLCA allows to make calculations for the MCI and the CI within openLCA.....	13

## List of Tables

Table 1: Variables required for circularity indicator calculations, and their respective location in the ecoinvent database .....	7
---	---

## 1 Introduction to the update

Released in July 2024, version 2 of the Circularity Package is built on top of ecoinvent 3.10 cut-off. The methodology has been maintained from the previous version.

Since the first release in June 2023, the authors presented this work in the CILCA 2023 and LCM2023<sup>1</sup> conferences, and published a scientific paper called [Integrating circularity into Life Cycle Assessment: Circularity with a life cycle perspective](#)<sup>2</sup>.

For now, it is observed that no other solution can calculate indicators for circular economy as rigorously as this database in combination with openLCA, where variables used for the indicators, e.g. waste produced, are tracked to very first life cycle stages.

## 2 Background

Both Life Cycle Assessment (LCA) as a tool and Circular Economy as a concept work towards sustainable development, only that both approaches are currently done individually: one assessment doesn't include the other.

Several circularity indicators have been proposed to quantify Circular Economy. After an initial assessment, two indicators were chosen for their completeness and ability to be integrated into LCA. The Material Circularity Indicator (MCI) proposed by the Ellen MacArthur Foundation and ANSYS Granta takes into account material flows [1], whilst the Circularity Index (CI) proposed by J. M. Cullen also takes into account the energy required for primary vs. secondary material production [2].

Circularity indicators can benefit hugely from a life cycle perspective, where circularity is considered not only in the last production stages but from the very beginning of raw material extraction. However, there is no current well-rounded solution for the integration of both, even though there have been initiatives from common LCA software (SimaPro, GaBi) and research projects (ORIENTING).

---

<sup>1</sup> CILCA is the Latin-American conference for LCA, held in Chile last year, and LCM is the life cycle management conference held in France for the year 2023, <https://www.greendelta.com/resources/>.

<sup>2</sup> Julia Cilleruelo Palomero, Louis Freboeuf, Andreas Ciroth, Guido Sonnemann (2024) [Integrating circularity into Life Cycle Assessment: Circularity with a life cycle perspective](#), Cleaner Environmental Systems, Volume 12, <https://doi.org/10.1016/j.cesys.2024.100175>.

(<https://www.sciencedirect.com/science/article/pii/S2666789424000138>)

“Circularity Package” database improves assessments for the Circular Economy by allowing circularity to also be tracked down the supply chain, incorporating a broader visualisation of circularity and consequently more accurate evaluations than those available so far.

### 3 Goal and Scope of the Circularity Package database, use advice

The Circularity Package database is developed to support decision making in the field of Circular Economy. It builds on the ecoinvent 3.10 cut-off database and its process inventories, and adds support for circularity indicators required for the Material Circularity Indicator (MCI), [1], and the Circularity Index (CI), [2].

The core environmental indicators are not modified, nor are the process datasets, as they are already supported by the ecoinvent cut-off database. Also, the environmental impact indicators available in the LCIA Methods are not modified, for the same reason.

The new database adds extra information to process datasets and adds an LCIA method for circularity to support indicators such as virgin material extracted, waste produced, material recovered, and energy usage. The rules and variable definitions for the circularity indicators were adapted to work with an LCA database. This is explained in Section 4.

When using the circularity database in a specific case study, it is responsibility of the user to create a foreground system that works with the circularity LCIA method. That is, if a new primary material, waste, recycling or transforming process is added, care must be taken to adapt the model to fit the LCIA method for circularity.

## 4 Methodology: how was circularity implemented?

### 4.1 Required variables for circularity

The variables required for circularity calculations are described in Table 1. These variables are tracked throughout the ecoinvent database with shadow elementary flows, see Figure 1 for an example.

To avoid double counting, virgin material is obtained from the strict beginning of the supply chain, shadowing flows that contain “..., in ground” in their name. On the other hand, waste is obtained from final waste treatment processes which are at the end of a supply chain, i.e. incineration or landfill processes. Recycled material is tracked from dummy “Recycled Content cut-off processes”. The rest of the variables are tracked within the processes along the supply chain, with a certain criterion described in Table 1. Figure 3 helps understand this visually.

A gravel producing process, an example with a screenshot in Figure 1, has a certain amount of virgin material coming from the elementary flow “gravel in ground” which is tracked in the output with an elementary flow for virgin material. Next to it, the elementary flow called “energy required for primary production” shadows the total energy required for that specific process.

Another example is the incineration of waste plastic, Figure 2. As a final waste treatment process, a shadow elementary flow for final waste produced is included, as well as a shadow elementary flow for secondary material produced or “recovered EoL material”, which tracks the input flow for sludge with a negative amount, a sign of recovered material in the ecoinvent database.

Table 1: Variables required for circularity indicator calculations, and their respective location in the ecoinvent database

Circularity Variable		MCI	CI	Circularity Package	Location in ecoinvent database
Virgin material	$V$	x		x	Elementary flows with names “ <i>Material name</i> , in ground”
Recycled material	$R$	x		x	Processes that contain “Recycled Content cut-off” in their name.
Recovered recycled materials	$R_r$	x		x	Input flows with negative amounts. These are recovered materials in ecoinvent.
Input recycled materials	$R_i$	x		(x)	Calculated variable: $R_i = R + R_r$
Mass	$M$	x		(x)	Calculated variable: $M = V + R_i$
Total waste for final disposal	$W$	x		x	Mainly processes under the category “3821: Treatment and disposal of non-hazardous waste” and “3822: Treatment and disposal of hazardous waste”
Waste from recycling processes	$W_C$	x		x	Mainly processes under the category “3811: Collection of non-hazardous waste”, but not exclusively.
Waste from the production of secondary material feedstock for second life material	$W_F$	x		x	Processes that produce recycled material, at the category “C: Manufacturing”
Energy required for primary material production	$E_p$		x	x	Energy required in processes that involve the production of primary materials or products
Energy required for secondary material production	$E_s$		x	x	Energy required in processes that involve the production of secondary materials
Life time of product	$L$	x		(x)	Input by user
Utility of product (number of uses)	$U$	x		(x)	Input by user



gravel production, crushed | gravel, crushed | Cutoff, U - RoW ×

**Inputs/Outputs: gravel production, crushed | gravel, crushed | Cutoff, U - RoW**

▼ Inputs

Flow	Category ^	Amount	Unit	Costs/Re...	Uncertai...	Avoided
tap water	360:Water collection...	0.00517	kg		lognorm...	
recultivation, limestone mine	390:Remediation act...	1.27000E...	m2		lognorm...	
building, hall, steel construction	410:Construction of ...	2.85000E...	m2		lognorm...	
gravel/sand quarry infrastructure	429:Construction of ...	4.75000E...	Item(s)		lognorm...	
diesel, burned in building machine	431:Demolition and ...	0.01430	MJ		lognorm...	
Gravel, in ground	Resource/in ground	1.04000	kg		lognorm...	
Water, unspecified natural origin	Resource/in water	0.00111	m3		lognorm...	
Occupation, lake, artificial	Resource/land	6.27000E...	m2*a		lognorm...	
Occupation, mineral extraction site	Resource/land	0.00029	m2*a		lognorm...	
Transformation, from unspecified	Resource/land	3.51000E...	m2		lognorm...	
Transformation, to lake, artificial	Resource/land	6.27000E...	m2		lognorm...	
Transformation, to mineral extract...	Resource/land	2.88000E...	m2		lognorm...	

▼ Outputs

Flow	Category ^	Amount	Unit	Costs/Re...	Uncertai...	Avoi
Water	Emission to water/u...	0.00082	m3		lognorm...	
Water	Emission to air/unsp...	0.00031	m3		lognorm...	
Particulates, < 2.5 um	Emission to air/low ...	4.00000E...	kg		lognorm...	
Particulates, > 10 um	Emission to air/low ...	5.60000E...	kg		lognorm...	
Particulates, > 2.5 um, and < 10um	Emission to air/low ...	2.00000E...	kg		lognorm...	
energy required for primary production	Circularity Indicators	0.05183	MJ		none	
virgin material (V)	Circularity Indicators	1.04000	kg		none	
waste mineral oil	382:Waste treatment...	2.50000E...	kg		lognorm...	
municipal solid waste	382:Waste treatment...	1.59697E...	kg		lognorm...	

Figure 1: Screenshot of a production process with some virgin material being extracted from earth

treatment of waste plastic, mixture, municipal incineration with fly ash... ×

**Inputs/Outputs: treatment of waste plastic, mixture, municipal incineration with fly a mixture | Cutoff, U - CH**

▼ Inputs

Flow	Category ^	Amount	Unit	Costs/Re...	Uncertai...	Avoided
quicklime, milled, packed	239:Manufacture of ...	0.00935	kg		lognorm...	
heat, district or industrial, natur...	351:Electric power g...	0.27524	MJ		lognorm...	
water, decarbonised	360:Water collection...	3.67610	kg		lognorm...	
metalliferous hydroxide sludge	382:Waste treatment...	-0.00450	kg	-1.88937...	lognorm...	
process-specific burdens, slag l...	382:Waste treatment...	0.02657	kg		lognorm...	
<b>waste plastic, mixture</b>	<b>382:Waste treatme...</b>	<b>1.00000</b>	<b>kg</b>		<b>none</b>	
process-specific burdens, resid...	382:Waste treatment...	0.01674	kg		lognorm...	
municipal waste incineration fa...	429:Construction of ...	2.50000E...	Item(s)		none	
residual material landfill	429:Construction of ...	3.48770E...	Item(s)		lognorm...	
slag landfill	429:Construction of ...	4.72370E...	Item(s)		lognorm...	
transport, freight, lorry, unspeci...	492:Other land trans...	0.00158	t*km		lognorm...	
Oxvnen	Resource/in air	2.47910	kg		lognorm...	

▼ Outputs

Flow	Category ^	Amount	Unit	Costs/Re...	Uncertai...	Avoided
spent activated carbon with ...	382:Waste treatment...	4.22710E...	kg		lognorm...	
waste cement, hydrated	382:Waste treatment...	0.00840	kg		lognorm...	
recovered EoL materials	Circularity Indicators	0.00450	kg		none	
<b>total waste produced (W)</b>	<b>Circularity Indicators</b>	<b>1.00000</b>	<b>kg</b>		<b>none</b>	
Aluminium	Emission to air/high ...	1.52160E...	kg		lognorm...	
Ammonia	Emission to air/high ...	1.73050E...	kg		lognorm...	
Antimony	Emission to air/high ...	3.21170E...	kg		lognorm...	

Figure 2: Screenshot of a waste treatment process for final disposal and some material recovery.



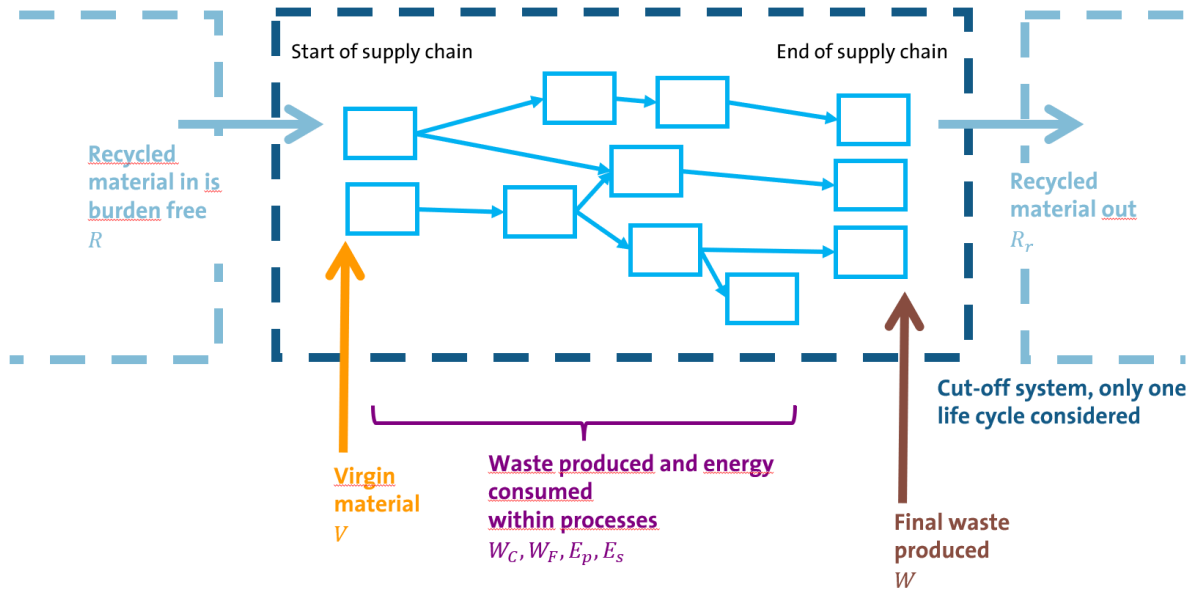


Figure 3: A generic life cycle model to explain the location of the shadowing elementary flows with respect to the supply chain

## 4.2 Adapted Circularity indicator calculations to fit LCA

The circularity indicators were revised to fit the information that is given from an LCA database. The following two sections show the adaptation and the algorithms that are used.

### 4.2.1 Material Circularity Indicator (MCI)

According to [1], the MCI is calculated following:

$$MCI_P = 1 - LFI \cdot F(X) \quad (1)$$

$$MCI_P = \max(0, MCI_P) \quad (2)$$

Where the Linear Flow Index,  $LFI$ , takes into account the linear flow of materials, and the utility factor,  $F(X)$ , looks at life time of products,  $L$ , compared to average and utility of the product,  $U$ , compared to average. Both equations are shown below.

$$LFI = \frac{V + W}{2M + \frac{W_F - W_C}{2}} \quad (3)$$

$$X = \frac{L}{L_{av}} \cdot \frac{U}{U_{av}} \quad (4)$$

$$F(X) = \frac{0.9}{X} \quad (5)$$

The circularity methodology developed for LCA considers that

$$M = V + R_i \quad (6)$$

Furthermore, it is common in LCA databases that waste,  $W$ , is not given per material but rather aggregated, e.g. “municipal solid waste”. Consequently, the total waste produced of a product system will be seen as larger than the virgin material used in the first place. To get a more realistic idea of the total waste coming from virgin material, Equation (7) was instead.

$$W = V - R_r \quad (7)$$

Consequently, the LFI doesn't use total waste produced any longer, but rather

$$LFI = \frac{2V - R_r}{2M + \frac{W_F - W_C}{2}} \quad (8)$$

#### 4.2.2 Circularity Index (CI)

Following [2], the CI is a product of two factors:

$$CI = \alpha\beta \quad (9)$$

$$CI_{max} = 1 \quad (10)$$

Where alpha,  $\alpha$ , looks at recovered recycled material,  $R_r$ , over total material demand:

$$\alpha = R_r / (V + R_i) \quad (11)$$

And beta,  $\beta$ , looks at energy required to recover material, with respect to energy required for primary production,  $E_p$ . The energy required to recover material is considered to be the same as energy required for secondary production,  $E_s$ .

$$\beta = 1 - \frac{E_s}{E_p} \quad (12)$$

### 4.3 Quantifying Circularity

The algorithms described above are integrated to a script in openLCA to calculate the circularity indicators, described in section 4.3.2. But before, circularity variables can already be quantified by running the model with the LCIA Method for Circularity developed with the database, Figure 4. This is further explained in the following section.

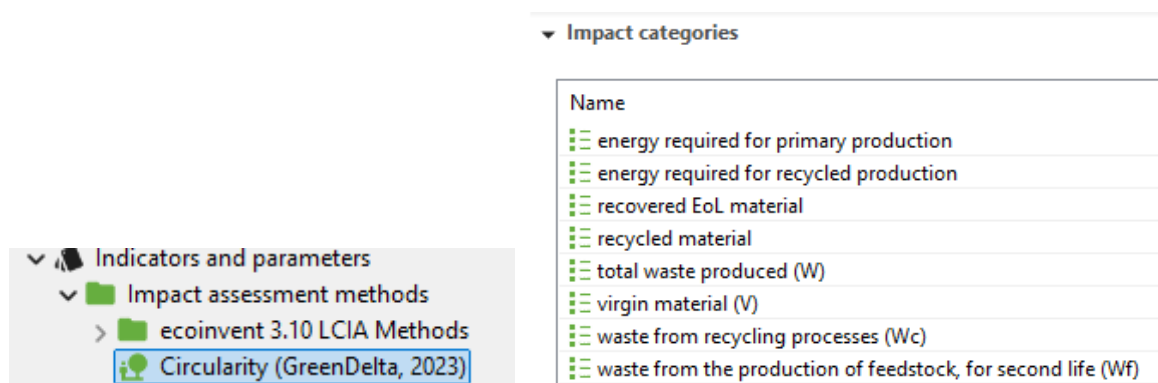


Figure 4: The Circularity LCIA Method allows to quantify circularity variables of the model

#### 4.3.1 Understanding supply chain in terms of Circularity

The model can be calculated with the LCIA Method developed for Circularity, see Figure 5, which tracks the shadowing elementary flows (explained in section 4.1) and displays information of circularity variables across the supply chain. These can be visualised in the results tab in several ways, as usual in openLCA, from a contribution tree to a Sankey diagram. Figure 6 shows a screenshot of the results and some supply chain information.

Calculation properties

**Calculation properties**  
 Please select the properties for the calculation

Allocation method: As defined in processes  
 Impact assessment method:  Circularity (GreenDelta, 2023)  
 Normalization and weighting set:   
 Calculation type: ☒ Lazy/On-demand ☐ Eager/All ☐ Monte Carlo Simulation  
☐ Regionalized calculation  
☐ Include cost calculation  
☐ Assess data quality

< Back Next > Finish Cancel

Figure 5: To visualise circularity across the supply chain, calculate the model with the LCIA Method for Circularity within the database

**battery production, lead acid, rechargeable, stationary | battery, lead acid, rechargeable, stationary | Cutoff, U**

**▼ Impact analysis: Circularity (GreenDelta, 2023)**  
 Sub-group by: ☒ Flows ☐ Processes | Don't show < 1 %

Name	Category	Inventory result	Characterization factor	Impact assessment result
>  energy required for primary production	Circularity variables (GreenDelta, 2023)			313.57714 MJ
>  energy required for recycled production	Circularity variables (GreenDelta, 2023)			47.19670 MJ
>  recovered EoL material	Circularity variables (GreenDelta, 2023)			65.88148 kg
recovered EoL materials	Circularity Indicators	65.88148 kg	1.00000 kg/kg	65.88148 kg
anaerobic digestion of manure   biogas   Cu	E:Water supply; sewerage, waste management ...	3.07018 kg		3.07018 kg
battery production, lead acid, rechargeable,	C:Manufacturing/27:Manufacture of electrical e...	62.00000 kg		62.00000 kg
>  recycled material	Circularity variables (GreenDelta, 2023)			-22.50344 kg
>  total waste produced (W)	Circularity variables (GreenDelta, 2023)			957.62478 kg
>  virgin material (V)	Circularity variables (GreenDelta, 2023)			632.53880 kg
virgin material (V)	Circularity Indicators	632.53880 kg	1.00000 kg/kg	632.53880 kg
copper mine operation and beneficiation, si	B:Mining and quarrying/07:Mining of metal ore...	7.12163 kg		7.12163 kg
copper mine operation and beneficiation, si	B:Mining and quarrying/07:Mining of metal ore...	22.58266 kg		22.58266 kg
copper mine operation and beneficiation, si	B:Mining and quarrying/07:Mining of metal ore...	23.44262 kg		23.44262 kg
gravel production, crushed   gravel, crushed	B:Mining and quarrying/08:Other mining and q...	11.93510 kg		11.93510 kg
hard coal mine operation and hard coal pre	B:Mining and quarrying/05:Mining of coal and l...	8.47758 kg		8.47758 kg
hard coal mine operation and hard coal pre	B:Mining and quarrying/05:Mining of coal and l...	7.29126 kg		7.29126 kg
lignite mine operation   lignite   Cutoff, U -	B:Mining and quarrying/05:Mining of coal and l...	13.72595 kg		13.72595 kg
limestone quarry operation   limestone, unp	B:Mining and quarrying/08:Other mining and q...	8.67535 kg		8.67535 kg
sand quarry operation, extraction from river	B:Mining and quarrying/08:Other mining and q...	8.62793 kg		8.62793 kg
silver mine operation with extraction   lead	B:Mining and quarrying/07:Mining of metal ore...	18.24800 kg		18.24800 kg
tin mine operation   tin concentrate   Cutoff,	B:Mining and quarrying/07:Mining of metal ore...	14.74170 kg		14.74170 kg
zinc mine operation   lead concentrate   Cut	B:Mining and quarrying/07:Mining of metal ore...	345.64351 kg		345.64351 kg
zinc mine operation   zinc concentrate   Cut	B:Mining and quarrying/07:Mining of metal ore...	36.09461 kg		36.09461 kg
>  waste from recycling processes (Wc)	Circularity variables (GreenDelta, 2023)			1.04143 kg
>  waste from the production of feedstock, for secor	Circularity variables (GreenDelta, 2023)			1.64934 kg

General information | Inventory results | **Impact analysis** | Process results | Contribution tree | Grouping | Locations | Sankey diagram | LCIA Checks | Tags

Figure 6: Screenshot for one of the multiple ways to visualise results for circularity across the supply chain with openLCIA

### 4.3.2 Quantifying Circularity with Circularity Indicators

The database comes with an attached jython script which can be opened and run directly in openLCA, Figure 7. It allows to input the last variables required for the calculation of the MCI: life time and utility of the product compared to average.

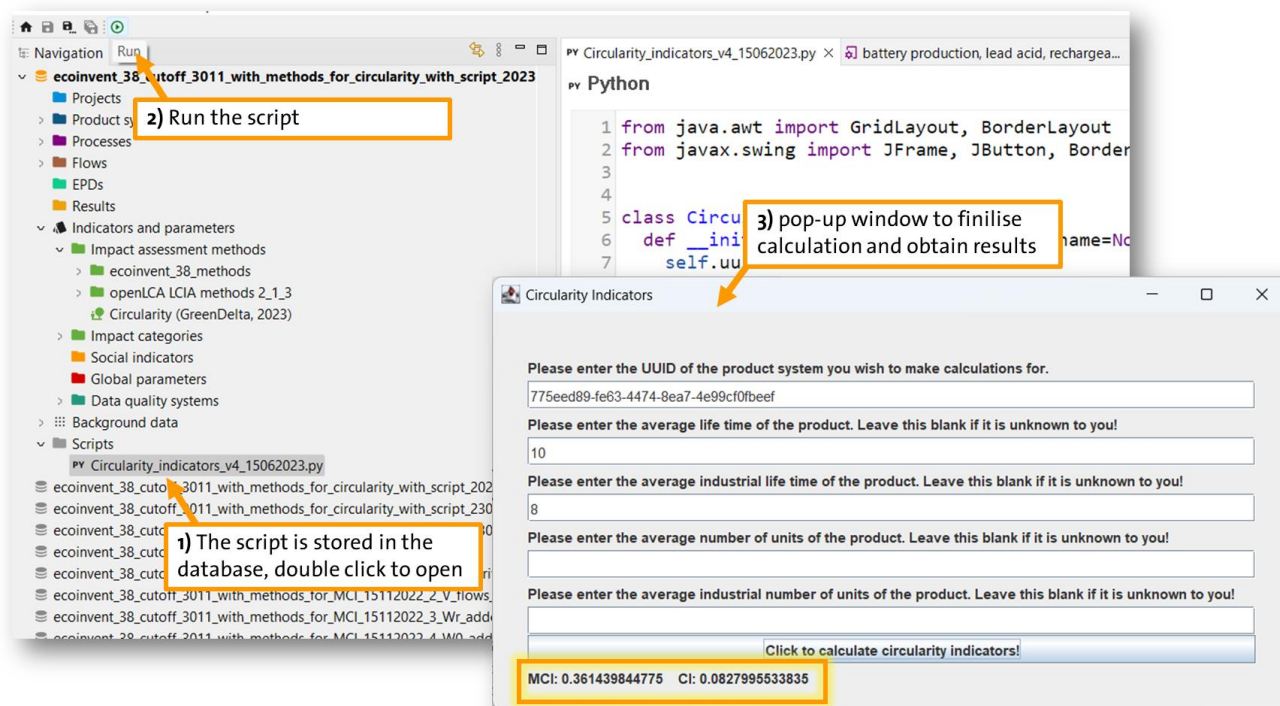


Figure 7: Circularity indicators script for openLCA allows to make calculations for the MCI and the CI within openLCA

## 5 Summary

Increasing attention is given to the idea of a Circular Economy as a way forwards for sustainable development, especially as governmental initiatives also consider it in their agenda for sustainable growth, such as the Circular Economy Action Plan from the European Green Deal, [3].

A lack of perspective of the overall picture of a product's supply chain, or a lack of a good way to quantify circularity can very easily lead to misleading ideas over a good circular decision, or very bluntly: greenwashing.

To avoid this, this report proposed a methodology where circularity is integrated to Life Cycle Assessment, where the same model used for an LCA can quantify circularity across the supply chain. The methodology is implemented in the ecoinvent 3.10 cut-off database, where shadowing elementary flows tracking circularity variables such as virgin material used, waste produced or energy used is quantified thanks to a circularity LCIA method developed, as well as

an add-on jython script to finally calculate circularity indicators (Material Circularity Indicator and Circularity Index).

Circularity Package database can help assess a circular solution, with a full life cycle perspective.

## 6 How to obtain the database & Support

You can acquire the database licence in our marketplace for data: openLCA Nexus

<https://nexus.openlca.org/databases>

Licence holders will also have access to maintenance updates.

Do you have any questions? You can contact us following this link:

<https://www.openlca.org/contact/>

Need support? Book direct support with us through Nexus:

[https://nexus.openlca.org/service/openLCA%20Support%20\(help%20desk\)](https://nexus.openlca.org/service/openLCA%20Support%20(help%20desk))

Use the "Insert Citation" button to add citations to this document.

## 7 References

- [1] Ellen MacArthur Foundation, "Material Circularity Indicator (MCI) Methodology," 2019. [Online]. Available: <https://emf.thirdlight.com/link/3jtevh1kbukz-9of4s4/@/preview/1?o>. [Accessed 18 April 2023].
- [2] J. Cullen, "Theoretical Benchmark or Perpetual Motion Machine?," *Journal of Industrial Ecology*, 21, pp. 483-486, 2017.
- [3] European Commission , "Circular economy action plan," [Online]. Available: [https://environment.ec.europa.eu/strategy/circular-economy-action-plan\\_en](https://environment.ec.europa.eu/strategy/circular-economy-action-plan_en). [Accessed 29 06 2023].